
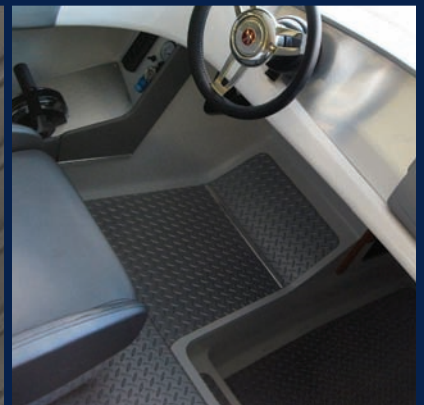


LONSEAL[®]

MARINE FLOORING

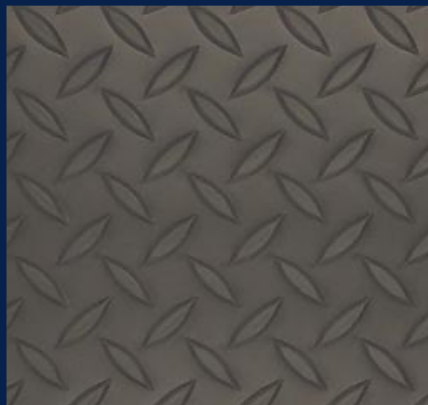

LONMARINE® WOOD

Offering the rugged endurance of classic steel plating, LONCOMMODORE is Lonseal's toughest and most durable resilient, slip-resistant sheet vinyl flooring. Perfect for heavy-duty applications in all kinds of nautical spaces.

FEATURES (data shown is nominal):

Roll Width: 6 ft. (1.8 m)

Roll Length: 60 ft. (18.3 m)

Overall Thickness: 0.080 in. (2.0 mm)

Wear Layer Thickness: 0.020 in. (0.5 mm)


Weight: 0.7 lbs./sq. ft., 250 lbs./roll



MW3473
Mahogany




MW3475
Solid Teak



MW370
Teak & Holly



MW371
Maple & Teak



MW373
Mahogany & Holly



MW375
Teak & Ebony



MW377
Walnut & Holly



MW378
Teak & Ivory



MW379
Antique & Ivory



LONMARINE® STONE

LONMARINE® STONE consists of a lightly dappled palette of neutral and gray tones that makes it a perfect fit for the interior spaces of both pleasure boats and hard-working industrial craft. The elegant marbled pattern helps mask routine scuffing that can occur with heavy foot traffic.

FEATURES (data shown is nominal):


Roll Width: 6 ft. (1.8 m)

Roll Length: 60 ft. (18.3 m)

Overall Thickness: 0.080 in. (2.0 mm)

Wear Layer Thickness: 0.020 in. (0.5 mm)

Weight: 0.7 lbs./sq. ft., 250 lbs./roll



MS10
Dorato



MS11
Grigio



MS12
Mare



MS13
Noce



MS14
Carbone



MS15
Russo

LONCOMMODORE

Offering the rugged endurance of classic steel plating, LONCOMMODORE is Lonseal's toughest and most durable resilient, skid-resistant sheet vinyl flooring. Perfect for heavy-duty applications in all kinds of nautical spaces.

FEATURES (data shown is nominal):



Roll Width: 6 ft. (1.8 m)

Roll Length: 60 ft. (18.3 m)

Overall Thickness: 0.140 in. (3.5 mm)

Wear Layer Thickness: 0.106 in. (2.7 mm)

Weight: 0.8 lbs./sq. ft., 285 lbs./roll



CM601
Poinsettia



CM602
Shark Skin



CM603
Oil Rubbed Bronze



CM604
Black Kettle



CM605
Dress Blues



LONWOOD MARINE

LONWOOD MARINE (not MED/USCG certified) is Lonseal's high-performance, slip-resistant marine safety flooring in teak and holly. Intended for interior spaces, Lonwood Marine comes in both a glossy surface option or with Lonseal's factory-applied low gloss, urethane finish, Topseal.

FEATURES (data shown is nominal):

Roll Width: 6 ft. (1.8 m)

Roll Length: 60 ft. (18.3 m)

Overall Thickness: 0.080 in. (2.0 mm)

Wear Layer Thickness: 0.02 in. (0.5 mm)

Weight: 0.6 lbs./sq. ft., 225 lbs./roll



W72G
Teak & Holly Gloss





W74TS
Teak & Holly Topseal

LONMARINE® TRIMS

6 ft. long and pre-drilled every 5"


(not MED/USCG certified)



ZZTRIM05 Trim
ZZTRIM15T T-Trim
Teak




ZZTRIM06 Trim
ZZTRIM16T T-Trim
Holly




ZZTRIM07 Trim
ZZTRIM17T T-Trim
Walnut



ZZTRIM08 Trim
ZZTRIM18T T-Trim
Cherry



ZZTRIM09 Trim
ZZTRIM19T T-Trim
Chestnut



ZZTRIM10 Trim
ZZTRIM20T T-Trim
Antique



**United States
Coast Guard Certified**



**MED 2014 / 90 / EU
Modules B & D Compliant**

All technical Information, including installation manuals, specifications, warranties and maintenance guidelines can be found at LONSEAL.com

For complimentary samples,
please call 800.832.7111.
Outside the U.S., call +1 310.830.7111

Lonseal, Inc.
928 East 238th Street
Carson, CA 90745 USA

See the full collection of marine flooring
products at LONSEAL.COM

